



UNIVERSITI TUN HUSSEIN ONN MALAYSIA

FINAL EXAMINATION SEMESTER II SESSION 2008/2009

COURSE NAME : MICROPROCESSOR AND MICROCONTROLLER

COURSE CODE : BEE 3233

PROGRAMME : 3 BEE

DATE OF EXAMINATION : APRIL 2009 / MAY 2009

DURATION : 3 HOURS

INSTRUCTION : ANSWER ANY FIVE (5) QUESTIONS FROM SEVEN (7) QUESTIONS

THIS QUESTION PAPER CONTAINS SIXTEEN (16) PAGES

- Q1** (a) Programmer's Model of 68000 comprises of many CPU registers. With the aid of diagram, explain briefly the functions for each component in Programmer's Model of 68000. (7 marks)
- (b) Motorola 68000 is a microprocessor that has been used in Macintosh computer. Explain briefly four advantages of the 68000 microprocessor. (4 marks)
- (c) CPU and its memory communicate via the system bus. Determine the maximum memory size for 68000 and calculate the address range to access memory. (3 marks)
- (d) List CCR flags in 68000 microprocessor and describe each function. If the Status Register value is 2506, what is the flag bit for C, Carry. (3 marks)
- Q2** (a) Absolute Addressing Mode used to fetch data in memory. The two variations of absolute mode are Absolute Long Mode and Absolute Short Mode. Explain the difference, function and advantage between these two addressing mode. (6 marks)
- (b) Given D0=\$0000 FFFF, D1 = \$0000 7FFF and status register CCR is XNZVC = 11111. All instructions are independent. What is the value of CCR after executing these instructions?
(i) ADD.L #1,D0
(ii) SUB.B #\$7F,D1
(iii) MULS D0,D1
(iv) ROXR.B D1 (4 marks)
- (c) Write the appropriate logic instruction to preserve bits 0, 3-9 and 13 of register D2, and clear all others. (2 marks)
- (d) Change the C program below to the assembly language where x is located in memory address \$2000 and y is located in memory address \$3000. Then, store the result for x in data register, D0 and the result for y in D3.
if (y>x)
 y = y+x
else if (y<x)
 x = x+y
else x = y (8 marks)

- Q3** (a) Explain the different functions of the internal A0 bit when used for:
(i) byte addressing
(ii) word addressing (4 marks)
- (b) Show the state of UDS and LDS when the 68000 is involved in the following memory accesses:
(i) a byte write to address 3000
(ii) a byte write to address 3001
(iii) a word write to address 3000 (6 marks)
- (c) Design partial decoder for a system with a ROM device which is 16k word (32k byte) starting address from \$000000, RAM device which is 64k word (128k byte) starting address from \$400000 and one Input/Output device place at address \$800000 until \$80001F (32 addresses). (10 marks)
- Q4** (a) Briefly explain the type of architecture used in the PIC microcontroller. What are its advantages ? (4 marks)
- (b) Explain the memory organisation of the PIC16F84A microcontroller as regards,
(i) Program Memory
(ii) Data memory (8 marks)
- (c) Explain the function of PORTA and TRISA register in the PIC16F84A microcontroller (4 marks)
- (d) Write an assembly language program to set PORT RA0, 1, 2, 3 as inputs and RA4 as output. (4 marks)
- Q5** (a) Explain the advantages of macro compare to subroutine. (5 marks)
- (b) Explain the concept of stack in the PIC16F84A microcontroller. (5 marks)

BEE 3233

- (c) PIC 16F84 does not have a division instruction. Therefore, write a macro to implement an instruction called DIVLW which will divide an 8-bit unsigned number in working register, WREG by a 4-bit unsigned literal number. The division product is a 4-bit number stored in lower four bit of working register and the remainder is stored in upper four bit of working register. Example of using this macro is shown below:

```
MOVLW 15h ;load WREG with 15h  
DIVLW 04h ;divide 15h in WREG by literal value  
           ;04h  
           ;Result is a 4 bit unsigned number  
           ;in lower 4 bit of WREG and remainder  
           ;Is in upper 4 bit of WREG
```

(10 marks)

- Q6** (a) State the number of clock cycles in a PIC instruction cycle and the number of instruction cycles taken to execute the following instructions:

- (i) ADDLW 50h
- (ii) RRF PORTB
- (iii) RETLW 24h
- (iv) IORWF FEh

(4 marks)

- (b) What is difference between control directives DEFINE and EQU? Give a related example for each of them. (4 marks)
- (c) Calculate the pre-load value required in TMR0 register to obtain a delay of 4ms between the load operation and the T0IF going high, if the clock rate is 4MHz and the value of PS2:PS1:PS0 in OPTION register are 1:0:0. (4 marks)
- (d) PIC16F84 is used to execute subroutine 1. If PIC clock input is 200kHz, calculate total delay to execute the subroutine1. (Initial C=0).

subroutine1

	MOVLW	10h
	MOVWF	20h
	MOVLW	.2
	MOVWF	30h
	MOVLW	.1
LOOP	RRF	20h
	SUBWF	30h
	BTFS	STATUS,2
	GOTO	LOOP

RETURN

(8 marks)

Q7 (a) The A/D converter has one 10-bit output, determine the resolution per bit and calculate the equivalent digital value of the output for the input given below (reference voltage, $V_{ref} = 5V$):

- i) 1 V
- ii) 1.25 V
- iii) 3.45 V

(4 marks)

(b) Write a sequence of instructions to initialize the analog to digital (A/D) converter in PIC16C71 if:

- PIC16C71 is clocked at 4 MHz
- A/D clock is $F_{osc}/8$
- Analog input is on RA0

(4 marks)

(c) Figure Q7(c) shows a temperature control system using PIC16C71 microcontroller. A temperature sensor is used to send the temperature in analog and to provide feedback to the microcontroller. Based on this feedback, the microcontroller controls the heater and the cooler in order to achieve the desired temperature in the plant.

Assume that the desired temperature is between 25°C and 30°C and the value in digital for 25°C is decimal 25 and 30°C is decimal 30.

From the statement above, answer the questions below:

i) Sketch the microcontroller circuit for the system and label the input and output port that you want to use in the system if:

- The system used one analog channel
- The input for the driver is four bits
- Temperature sensor used is LM35

Your circuit should include:

- Reset circuit
- Clock circuit
- Connection between sensor and PIC
- Connection between PIC and driver

ii) Analyze and plan the program for the system by using flowchart.

(12 marks)

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
COURSE : MICROPROCESSOR AND
MICROCONTROLLER

PROGRAMME : 3 BEE
COURSE CODE : BEE 3233

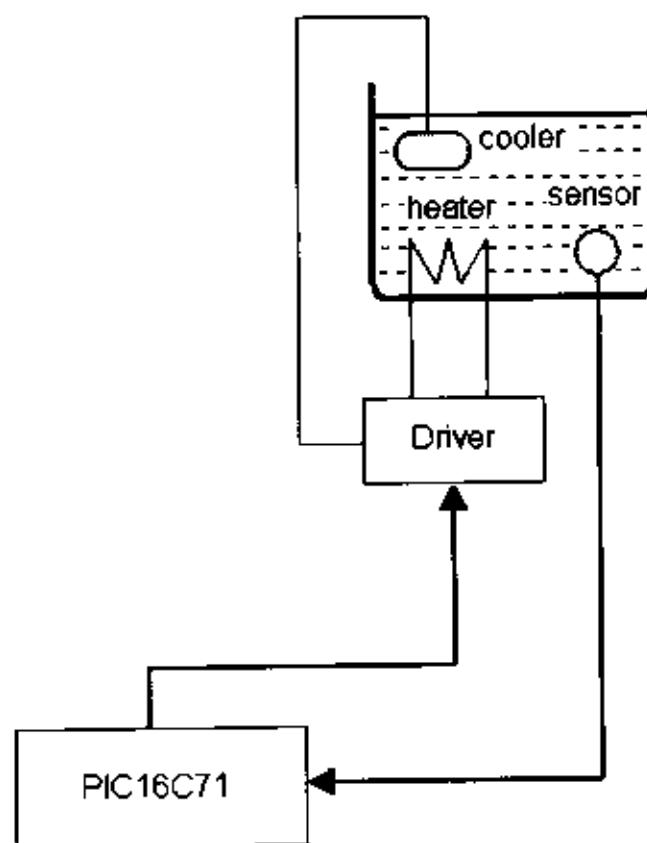


Figure Q7(c)

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
 COURSE : MICROPROCESSOR AND
 MICROCONTROLLER

PROGRAMME : 3 BEE
 COURSE CODE : BEE 3233

Special Function Register (SFR) File Summary for PIC16F84A

Addr	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Value on Power-on RESET	Details on page					
Bank 0																
00h	INDF	Uses contents of FSR to address Data Memory (not a physical register)								---- ----	11					
01h	TMRO	8-bit Real-Time Clock/Counter								xxxx xxxx	20					
02h	PCL	Low Order 8 bits of the Program Counter (PC)								0000 0000	11					
03h	STATUS ⁽²⁾	IRP	RP1	RP0	TO	PD	Z	DC	C	0001 1xxx	8					
04h	FSR	Indirect Data Memory Address Pointer D								xxxx xxxx	11					
05h	PORTA ⁽⁴⁾	—	—	—	RA4/T0CKI	RA3	RA2	RA1	RA0	---x xxxx	16					
06h	PORTB ⁽⁵⁾	RB7	RB6	RB5	RB4	RB3	RB2	RB1	RB0/INT	xxxx xxxx	18					
07h	—	Unimplemented location, read as '0'								—	—					
08h	EEDATA	EEPROM Data Register								xxxx xxxx	13,14					
09h	EEADR	EEPROM Address Register								xxxx xxxx	13,14					
0Ah	PCLATH	—	—	—	Write Buffer for upper 5 bits of the PC ⁽¹⁾					---0 0000	11					
0Bh	INTCON	GIE	EEIE	TOIE	INTE	RBIE	T0IF	INTF	RBIF	0000 000x	10					
Bank 1																
80h	INDF	Uses Contents of FSR to address Data Memory (not a physical register)								---- ----	11					
81h	OPTION_REG	RBPU	INTEDG	T0CS	T0SE	PSA	PS2	PS1	PS0	1111 1111	9					
82h	PCL	Low order 8 bits of Program Counter (PC)								0000 0000	11					
83h	STATUS ⁽²⁾	IRP	RP1	RP0	TO	PD	Z	DC	C	0001 1xxx	8					
84h	FSR	Indirect data memory address pointer D								xxxx xxxx	11					
85h	TRISA	—	—	—	PORTA Data Direction Register					---1 1111	16					
86h	TRISB	PORTB Data Direction Register								1111 1111	18					
87h	—	Unimplemented location, read as '0'								—	—					
88h	EECON1	—	—	—	EEIF	WRERR	WREN	WR	RD	---0 x000	13					
89h	EECON2	EEPROM Control Register 2 (not a physical register)								---- ----	14					
DAh	PCLATH	—	—	—	Write buffer for upper 5 bits of the PC ⁽¹⁾					---0 0000	11					
0Bh	INTCON	GIE	EEIE	TOIE	INTE	RBIE	T0IF	INTF	RBIF	0000 000x	10					

Legend: x = unknown u = unchanged. - = unimplemented, read as '0'. q = value depends on condition

Note 1: The upper byte of the program counter is not directly accessible. PCLATH is a slave register for PC<12:8>. The contents of PCLATH can be transferred to the upper byte of the program counter, but the contents of PC<12:8> are never transferred to PCLATH.

2: The TO and PD status bits in the STATUS register are not affected by a MCLR Reset.

3: Other (non power-up) RESETS include external RESET through MCLR and the Watchdog Timer Reset.

4: On any device RESET, these pins are configured as inputs.

5: This is the value that will be in the port output latch.

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
 COURSE : MICROPROCESSOR AND
 MICROCONTROLLER

PROGRAMME : 3 BEE
 COURSE CODE : BEE 3233

STATUS Register of PIC16F84A

R/W-0	R/W-0	R/W-0	R-1	R-1	R/W-x	R/W-x	R/W-x
IRP	RP1	RP0	TO	PD	Z	DC	C
bit 7							bit 0

- bit 7-6 **Unimplemented:** Maintain as '0'
- bit 5 **RP0:** Register Bank Select bits (used for direct addressing)
 01 = Bank 1 (80h - FFh)
 00 = Bank 0 (00h - 7Fh)
- bit 4 **TO:** Time-out bit
 1 = After power-up, CLRWDTR instruction, or SLEEP instruction
 0 = A WDT time-out occurred
- bit 3 **PD:** Power-down bit
 1 = After power-up or by the CLRWDTR instruction
 0 = By execution of the SLEEP instruction
- bit 2 **Z:** Zero bit
 1 = The result of an arithmetic or logic operation is zero
 0 = The result of an arithmetic or logic operation is not zero
- bit 1 **DC:** Digit carry/borrow bit (ADDWF, ADDLW, SUBWF, SUBLW instructions) (for borrow, the polarity is reversed)
 1 = A carry-out from the 4th low order bit of the result occurred
 0 = No carry-out from the 4th low order bit of the result
- bit 0 **C:** Carry/borrow bit (ADDMW, ADDLW, SUBLW, SUBWL Instructions) (for borrow, the polarity is reversed)
 1 = A carry-out from the Most Significant bit of the result occurred
 0 = No carry-out from the Most Significant bit of the result occurred

Note: A subtraction is executed by adding the two's complement of the second operand.
 For rotate (RRF, RLF) instructions, this bit is loaded with either the high or low order bit of the source register.

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
 COURSE : MICROPROCESSOR AND
 MICROCONTROLLER

PROGRAMME : 3 BEE
 COURSE CODE : BEE 3233

OPTION Register of PIC16F84A / PIC16C71

R/W-1	R/W-1	R/W-1	R/W-1	R/W-1	R/W-1	R/W-1	R/W-1
RBPU	INTEDG	TOCS	TOSE	PSA	PS2	PS1	PS0
bit 7							bit 0

- bit 7 **RBPU:** PORTB Pull-up Enable bit
 1 = PORTB pull-ups are disabled
 0 = PORTB pull-ups are enabled by individual port latch values
- bit 6 **INTEDG:** Interrupt Edge Select bit
 1 = Interrupt on rising edge of RB0/INT pin
 0 = Interrupt on falling edge of RB0/INT pin
- bit 5 **TOCS:** TMR0 Clock Source Select bit
 1 = Transition on RA4/TOCKI pin
 0 = Internal instruction cycle clock (CLKOUT)
- bit 4 **TOSE:** TMR0 Source Edge Select bit
 1 = Increment on high-to-low transition on RA4/TOCKI pin
 0 = Increment on low-to-high transition on RA4/TOCKI pin
- bit 3 **PSA:** Prescaler Assignment bit
 1 = Prescaler is assigned to the WDT
 0 = Prescaler is assigned to the Timer0 module
- bit 2-0 **PS2:PS0:** Prescaler Rate Select bits

Bit Value	TMR0 Rate	WDT Rate
000	1:2	1:1
001	1:4	1:2
010	1:8	1:4
011	1:16	1:8
100	1:32	1:16
101	1:64	1:32
110	1:128	1:64
111	1:256	1:128

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
 COURSE : MICROPROCESSOR AND
 MICROCONTROLLER

PROGRAMME : 3 BEE
 COURSE CODE : BEE 3233

INTCON Register of PIC16F84A

R/W-0	R/W-x							
GIE	EEIE	TOIE	INTE	RBIE	TOIF	INTF	RBIF	
bit 7								bit 0

- bit 7 **GIE:** Global Interrupt Enable bit
 1 = Enables all unmasksed interrupts
 0 = Disables all interrupts
- bit 6 **EEIE:** EE Write Complete Interrupt Enable bit
 1 = Enables the EE Write Complete interrupt
 0 = Disables the EE Write Complete interrupt
- bit 5 **TOIE:** TMR0 Overflow Interrupt Enable bit
 1 = Enables the TMR0 interrupt
 0 = Disables the TMR0 interrupt
- bit 4 **INTE:** RB0/INT External Interrupt Enable bit
 1 = Enables the RB0/INT external interrupt
 0 = Disables the RB0/INT external interrupt
- bit 3 **RBIE:** RB Port Change Interrupt Enable bit
 1 = Enables the RB port change interrupt
 0 = Disables the RB port change interrupt
- bit 2 **TOIF:** TMR0 Overflow Interrupt Flag bit
 1 = TMR0 register has overflowed (must be cleared in software)
 0 = TMR0 register did not overflow
- bit 1 **INTF:** RB0/INT External Interrupt Flag bit
 1 = The RB0/INT external interrupt occurred (must be cleared in software)
 0 = The RB0/INT external interrupt did not occur
- bit 0 **RBIF:** RB Port Change Interrupt Flag bit
 1 = At least one of the RB7:RB4 pins changed state (must be cleared in software)
 0 = None of the RB7:RB4 pins have changed state

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
 COURSE : MICROPROCESSOR AND
 MICROCONTROLLER

PROGRAMME : 3 BEE
 COURSE CODE : BEE 3233

Special Function Register (SFR) File Summary for PIC16C71

Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Value on: POR, BOR	Value on all other resets (1)
Bank 0											
00h ⁽²⁾	INDF									0000 0000	0000 0000
01h	TMRD									xxxx xxxx	aaaa aaaa
02h ⁽³⁾	PCL									0000 0000	0000 0000
03h ⁽⁴⁾	STATUS	IRP ⁽⁵⁾	RP1 ⁽⁶⁾	RPO	TO	TD	Z	DC	C	0001 1xxx	0000 gaaa
04h ⁽⁷⁾	FSR									xxxx xxxx	aaaa aaaa
05h	PORTA	—	—	—						---x 0000	---u 0000
06h	PORTB									xxxx xxxx	aaaa aaaa
07h	—									—	—
08h	ADCON0	ADCS1	ADCS0	M ⁽⁸⁾	CHS1	CHS0	GODONE	ADIF	ADON	00-0 0000	00-0 0000
09h ⁽⁹⁾	ADRES									xxxx xxxx	aaaa aaaa
0Ah ⁽¹⁰⁾	PCLATH	—	—	—						---0 0000	---0 0000
0Bh ⁽¹¹⁾	INTCON	GIE	ADIE	T0IE	INTE	RBIE	T0IF	INTF	RBIF	0000 000x	0000 000u
Bank 1											
80h ⁽¹²⁾	INDF									0000 0000	0000 0000
81h	OPTION	RP0U	INTEDG	TOCS	TOSE	PSA	PS2	PS1	PS0	1111 1111	1111 1111
82h ⁽¹³⁾	PCL									0000 0000	0000 0000
83h ⁽¹⁴⁾	STATUS	IRP ⁽⁵⁾	RP1 ⁽⁶⁾	RPO	TO	TD	Z	DC	C	0001 1xxx	0000 gaaa
84h ⁽¹⁵⁾	FSR									xxxx xxxx	aaaa aaaa
85h	TRISA	—	—	—						---1 1111	---1 1111
86h	TRISB									1111 1111	1111 1111
87h ⁽¹⁶⁾	PCON	—	—	—	—	—	—	—	—	---- --qq	---- --uu
88h	ADCON1	—	—	--	—	—	—	—	PCFG1	PCFG0	---- --00
89h ⁽¹⁷⁾	ADRES									xxxx xxxx	aaaa aaaa
8Ah ⁽¹⁸⁾	PCLATH	—	—	—						---0 0000	---0 0000
8Bh ⁽¹⁹⁾	INTCON	GIE	ADIE	T0IE	INTE	RBIE	T0IF	INTF	RBIF	0000 000x	0000 000u

Legend: x = unknown, u = unchanged, q = value depends on condition, - = unimplemented read as '0'.

Shaded locations are unimplemented, read as '0'.

- Note 1: Other (non power-up) resets include external reset through MCLR and Watchdog Timer Reset
 2: The upper byte of the program counter is not directly accessible. PCLATH is a holding register for the PC<12:8> whose contents are transferred to the upper byte of the program counter.
 3: These registers can be addressed from either bank.
 4: The PCON register is not physically implemented in the PIC16C71, read as '0'.
 5: The IRP and RP1 bits are reserved on the PIC16C710/71/711, always maintain these bits clear.
 6: Bit5 of ADCON0 is a General Purpose R/W bit for the PIC16C710/711 only. For the PIC16C71, this bit is unimplemented, read as '0'.

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
 COURSE : MICROPROCESSOR AND
 MICROCONTROLLER

PROGRAMME : 3 BEE
 COURSE CODE : BEE 3233

STATUS Register of PIC16C71

R/W-0	R/W-0	R/W-0	R-1	R-1	R/W-x	R/W-x	R/W-x
IRP	RP1	RP0	T0	PD	Z	DC	C
bit7							bit0

R = Readable bit
 W = Writable bit
 U = Unimplemented bit,
 read as '0'
 - n = Value at POR reset

bit 7: **IRP**: Register Bank Select bit (used for indirect addressing)

- 1 = Bank 2, 3 (100h - 1FFh)
- 0 = Bank 0, 1 (00h - FFh)

bit 6-5: **RP1:RP0**: Register Bank Select bits (used for direct addressing)

- 11 = Bank 3 (180h - 1FFh)
 - 10 = Bank 2 (100h - 17Fh)
 - 01 = Bank 1 (80h - FFh)
 - 00 = Bank 0 (00h - 7Fh)
- Each bank is 128 bytes

bit 4: **T0**: Time-out bit

- 1 = After power-up, CLRWDTR instruction, or SLEEP instruction
- 0 = A WDT time-out occurred

bit 3: **PD**: Power-down bit

- 1 = After power-up or by the CLRWDTR instruction
- 0 = By execution of the SLEEP instruction

bit 2: **Z**: Zero bit

- 1 = The result of an arithmetic or logic operation is zero
- 0 = The result of an arithmetic or logic operation is not zero

bit 1: **DC**: Digit carry/borrow bit (ADDWF, ADDLW, SUBWF, SUBLW instructions)(for borrow the polarity is reversed)

- 1 = A carry-out from the 4th low order bit of the result occurred
- 0 = No carry-out from the 4th low order bit of the result

bit 0: **C**: Carry/borrow bit (ADDWF, ADDLW, SUBWF, SUBLW Instructions)

- 1 = A carry-out from the most significant bit of the result occurred
- 0 = No carry-out from the most significant bit of the result occurred

Note: For borrow the polarity is reversed. A subtraction is executed by adding the two's complement of the second operand. For rotate (RRF, RLF) instructions, this bit is loaded with either the high or low order bit of the source register.

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
 COURSE : MICROPROCESSOR AND
 MICROCONTROLLER

PROGRAMME : 3 BEE
 COURSE CODE : BEE 3233

INTCON Register of PIC16C71

R/W-0	R/W-x						
GIE	ADIE	TOIE	INTE	RBIE	TOIF	INTF	RBIF

bit7

bit0

- bit 7: **GIE:**⁽¹⁾ Global Interrupt Enable bit
 1 = Enables all un-masked interrupts
 0 = Disables all interrupts
- bit 6: **ADIE:** A/D Converter interrupt Enable bit
 1 = Enables A/D interrupt
 0 = Disables A/D interrupt
- bit 5: **TOIE:** TMR0 Overflow Interrupt Enable bit
 1 = Enables the TMR0 interrupt
 0 = Disables the TMR0 interrupt
- bit 4: **INTE:** RB0/INT External Interrupt Enable bit
 1 = Enables the RB0/INT external interrupt
 0 = Disables the RB0/INT external interrupt
- bit 3: **RBIE:** RB Port Change Interrupt Enable bit
 1 = Enables the RB port change interrupt
 0 = Disables the RB port change interrupt
- bit 2: **TOIF:** TMR0 Overflow Interrupt Flag bit
 1 = TMR0 register has overflowed (must be cleared in software)
 0 = TMR0 register did not overflow
- bit 1: **INTF:** RB0/INT External Interrupt Flag bit
 1 = The RB0/INT external interrupt occurred (must be cleared in software)
 0 = The RB0/INT external interrupt did not occur
- bit 0: **RBIF:** RB Port Change Interrupt Flag bit
 1 = At least one of the RB7:RB4 pins changed state (must be cleared in software)
 0 = None of the RB7:RB4 pins have changed state

R	= Readable bit
W	= Writable bit
U	= Unimplemented bit. read as '0'
-n	= Value at POR reset

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
 COURSE : MICROPROCESSOR AND
 MICROCONTROLLER

PROGRAMME : 3 BEE
 COURSE CODE : BEE 3233

ADCON0 Register of PIC16C71

R/W-0	R/W-0	U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
ADCS1	ADCS0	— (n)	CHS1	CHS0	GO/DONE	ADIF	ADON
bit7							b#0

R = Readable bit
 W = Writable bit
 U = Unimplemented
 bit, read as '0'
 - n = Value at POR reset

bit 7-6: ADCS1:ADCS0: A/D Conversion Clock Select bits

- 00 = Fosc/2
- 01 = Fosc/8
- 10 = Fosc/32
- 11 = FRC (clock derived from an RC oscillation)

bit 5: Unimplemented: Read as '0'.

bit 4-3: CHS1:CHS0: Analog Channel Select bits

- 00 = channel 0, (RA0/AN0)
- 01 = channel 1, (RA1/AN1)
- 10 = channel 2, (RA2/AN2)
- 11 = channel 3, (RA3/AN3)

bit 2: GO/DONE: A/D Conversion Status bit

If ADON = 1

- 1 = A/D conversion in progress (setting this bit starts the A/D conversion)
- 0 = A/D conversion not in progress (This bit is automatically cleared by hardware when the A/D conversion is complete)

bit 1: ADIF: A/D Conversion Complete Interrupt Flag bit

- 1 = conversion is complete (must be cleared in software)
- 0 = conversion is not complete

bit 0: ADON: A/D On bit

- 1 = A/D converter module is operating
- 0 = A/D converter module is shutdown and consumes no operating current

Note 1: Bit5 of ADCON0 is a General Purpose R/W bit for the PIC16C710/711 only. For the PIC16C71, this bit is unimplemented, read as '0'.

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
 COURSE : MICROPROCESSOR AND
 MICROCONTROLLER

PROGRAMME : 3 BEE
 COURSE CODE : BEE 3233

ADCON1 Register of PIC16C71

U-0	U-0	U-0	U-0	U-0	U-0	R/W-0	R/W-0
—	—	—	—	—	—	PCFG1	PCFG0

bit7

bit0

R = Readable bit
 W = Writable bit
 U = Unimplemented bit, read as '0'
 - n = Value at POR reset

bit 7-2: Unimplemented: Read as '0'

bit 1-0: PCFG1:PCFG0: A/D Port Configuration Control bits

PCFG1:PCFG0	RA1 & RA0	RA2	RA3	VREF
00	A	A	A	VDD
01	A	A	VREF	RA3
10	A	D	D	VDD
11	D	D	D	VDD

A = Analog Input

D = Digital I/O

FINAL EXAMINATION

SEMESTER/SESSION : II/2008/09
 COURSE : MICROPROCESSOR AND
 MICROCONTROLLER

PROGRAMME : 3 BEE
 COURSE CODE : BEE 3233

PIC16F84A Instruction Set Summary

Mnemonic, Operands	Description	Cycles	14-Bit Opcode		Status Affected	Notes
			MSb	Lsb		
BYTE-ORIENTED FILE REGISTER OPERATIONS						
ADDWF f, d	Add W and f	1	00 0111	ffff ffff	C.DC.Z	1,2
ANDWF f, d	AND W with f	1	00 0101	ffff ffff	Z	1,2
CLRF f	Clear f	1	00 0001	1fff ffff	Z	2
CLRW .	Clear W	1	00 0001	0xxx xxxx	Z	
COMF f, d	Complement f	1	00 1001	ffff ffff	Z	1,2
DECf f, d	Decrement f	1	00 0011	ffff ffff	Z	1,2
DECFSZ f, d	Decrement f, Skip if 0	1(2)	00 1011	ffff ffff		1,2,3
INCF f, d	Increment f	1	00 1010	ffff ffff	Z	1,2
INCFSZ f, d	Increment f, Skip if 0	1(2)	00 1111	ffff ffff		1,2,3
IOWF f, d	Inclusive OR W with f	1	00 0100	ffff ffff	Z	1,2
MOVF f, d	Move f	1	00 1000	ffff ffff	Z	1,2
MOVWF f	Move W to f	1	00 0000	1fff ffff		
NOP .	No Operation	1	00 0000	0xxx 0000		
RLF f, d	Rotate Left f through Carry	1	00 1101	ffff ffff	C	1,2
RRF f, d	Rotate Right f through Carry	1	00 1100	ffff ffff	C	1,2
SUBWF f, d	Subtract W from f	1	00 0010	ffff ffff	C.DC.Z	1,2
SWAPF f, d	Swap nibbles in f	1	00 1110	ffff ffff		1,2
XORWF f, d	Exclusive OR W with f	1	00 0110	ffff ffff	Z	1,2
BIT-ORIENTED FILE REGISTER OPERATIONS						
BCF f, b	Bcf Clear f	1	01 0bbb	bfff ffff		1,2
BSF f, b	Bsf Set f	1	01 01bb	bfff ffff		1,2
BTFSZ f, b	Bit Test f, Skip if Clear	1(2)	01 10bb	bfff ffff		3
BTFSZ f, b	Bit Test f, Skip if Set	1(2)	01 11bb	bfff ffff		3
LITERAL AND CONTROL OPERATIONS						
ADDLW k	Add literal and W	1	11 111x	kkkk kkkk	C.DC.Z	
ANDLW k	AND literal with W	1	11 1001	kkkk kkkk	Z	
CALL k	Call subroutine	2	10 0kkk	kkkk kkkk		
CLRWD	Clear Watchdog Timer	1	00 0000	0110 0100	TO.PD	
GOTO k	Go to address	2	10 1kkk	kkkk kkkk		
IORLW k	Inclusive OR literal with W	1	11 1000	kkkk kkkk	Z	
MOVlw k	Move literal to W	1	11 00xx	kkkk kkkk		
RETFIE .	Return from interrupt	2	00 0000	0000 1001		
RETLW k	Return with literal in W	2	11 01xx	kkkk kkkk		
RETURN .	Return from Subroutine	2	00 0000	0000 1000		
SLEEP .	Go into standby mode	1	00 0000	0110 0011	TO.PD	
SUBLW k	Subtract W from literal	1	11 110x	kkkk kkkk	C.DC.Z	
XORLW k	Exclusive OR literal with W	1	11 1010	kkkk kkkk	Z	