

CONFIDENTIAL



UNIVERSITI TUN HUSSEIN ONN MALAYSIA

**FINAL EXAMINATION
SEMESTER II
SESSION 2014/2015**

COURSE NAME : STRUCTURE ANALYSIS &
DESIGN
COURSE CODE : BNP 20803
PROGRAMME : 2 BNA/2 BNB/2 BNC
EXAMINATION DATE : JUNE 2015/JULY 2015
DURATION : 3 HOURS
INSTRUCTION : ANSWER **FOUR (4)** QUESTIONS
ONLY

DESIGN SHOULD BE BASED ON:
BS EN 1990:2002+A1 2005
NA BS EN 1990:2002+A1:2005
BS EN 1991-1-1:2002
NA BS EN 1991-1-1:2002
BS EN 1992-1-1:2004
BS 8110:PART 1:1997
BS EN 1993 :2005

THIS QUESTIONS PAPER CONSISTS OF **SIXTEEN (16)** PAGES

CONFIDENTIAL

CONFIDENTIAL

- Q1** One continuous beam which is supported by roller at B and D and fixed end support at C has uniformly distributed load 1500 kN/m along the beam as shown in **FIGURE Q1**. Given EI is constant.
- (a) Calculate the moment at the joints by using moment distribution method. (12 marks)
- (b) Determine the support reaction. (5 marks)
- (c) Draw the shear force diagram (4 marks)
- (d) Draw the bending moment diagram. (4 marks)
- Q2**
- (a) There are several steps need to be considered to fulfill the structural design process. Describe the design process which involved building form and structural arrangement. (3 marks)
- (b) Explain briefly the important of serviceability limit state in the design stage for the structures. (3 marks)
- (c) **FIGURE Q2** shows part of the ground floor plan of a reinforced concrete office building. Slab thickness is 125 mm. Dimensions of the beams is given in the diagram. The finishes, ceiling and services form a characteristics permanent action of 1.5 kN/m². The characteristic variable action is 3.0 kN/m². 3.0 m high brickwall weighing 2.6 kN/m² is placed over the entire span of all beams. Given the additional following data:
- | | |
|---|-------------------------|
| Concrete Grade, f_{ck} | = 25 N/mm ² |
| Steel reinforcement Grade 500, f_{yk} | = 500 N/mm ² |
| Weight of concrete | = 25 kN/m ³ |
- (i) Analyze the design action carried by beam B/1-2 and sketch the action distribution on the beam from each slab. (15 marks)
- (ii) Calculate and sketch the bending moment and shear force for beam B/1-2. (4 marks)

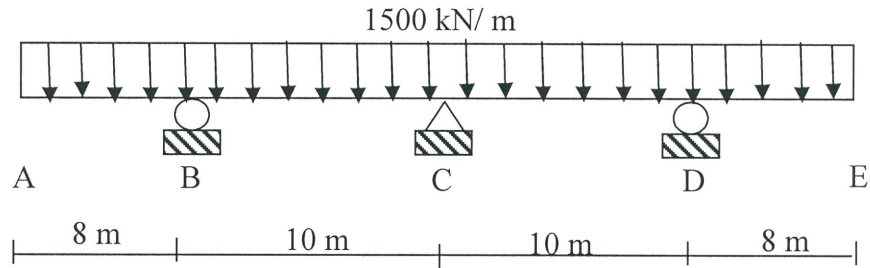
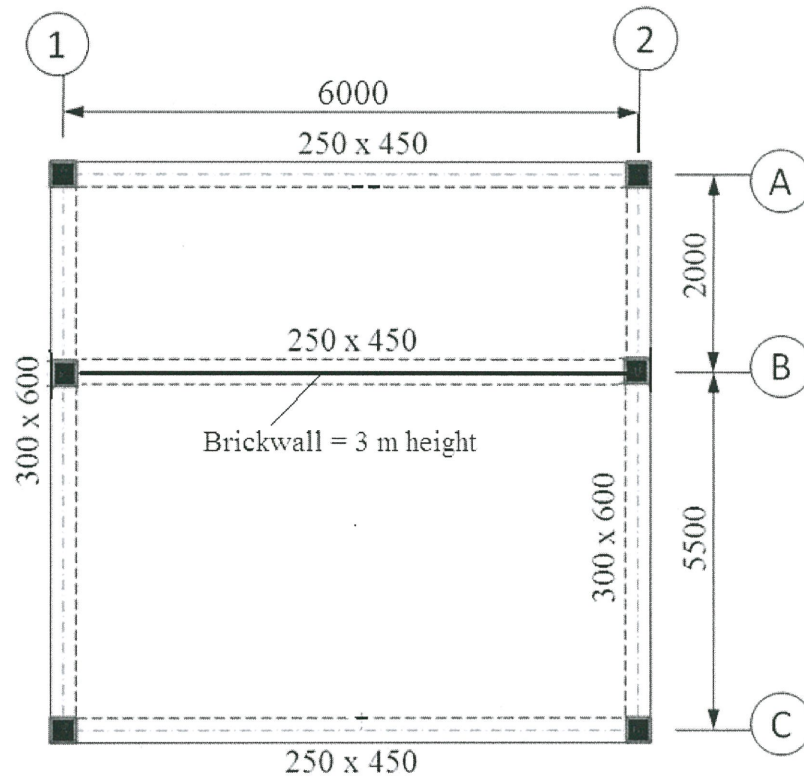
CONFIDENTIAL**FINAL EXAMINATION**

SEMESTER/SESI: SEM II/2014/2015

PROGRAMME: 2BNA/2BNB/2BNC

COURSE NAME: STRUCTURE ANALYSIS & DESIGN

COURSE CODE: BNP 20803

**FIGURE Q1****FIGURE Q2**

CONFIDENTIAL

Q3 A rectangular reinforced concrete beam in **FIGURE Q3** is simply supported on two masonry wall and 8.0 m length. Given;

Characteristic Action:	
Permanent, g_k	= 15 kN/m (excluding selfweight)
Variable, q_k	= 10 kN/m
Design life	= 50 years
Fire resistance	= R60
Exposure classes	= XC1
Material	
Strength of concrete, f_{ck}	= 20 N/mm ²
Strength of steel, f_{yk}	= 500 N/mm ²
Strength of link, f_{yk}	= 500 N/mm ²
Unit weight of reinforced concrete	= 25 kN/m ³
Use assumed size of bar as bellow:	
\varnothing_{bar1}	= 20 mm
\varnothing_{bar2}	= 12 mm
\varnothing_{link}	= 8 mm

- (a) Determine the nominal concrete cover. (3 marks)
- (b) Determine the shear force and bending moment. (3marks)
- (c) Design the main reinforcement. (7marks)
- (d) Design shears reinforcement. (7 marks)
- (e) Check the deflection and cracking of beam. (5marks)

CONFIDENTIAL

FINAL EXAMINATION

SEMESTER/SESI: SEM II/2014/2015

PROGRAMME: 2BNA/2BNB/2BNC

COURSE NAME: STRUCTURE ANALYSIS & DESIGN

COURSE CODE: BNP 20803

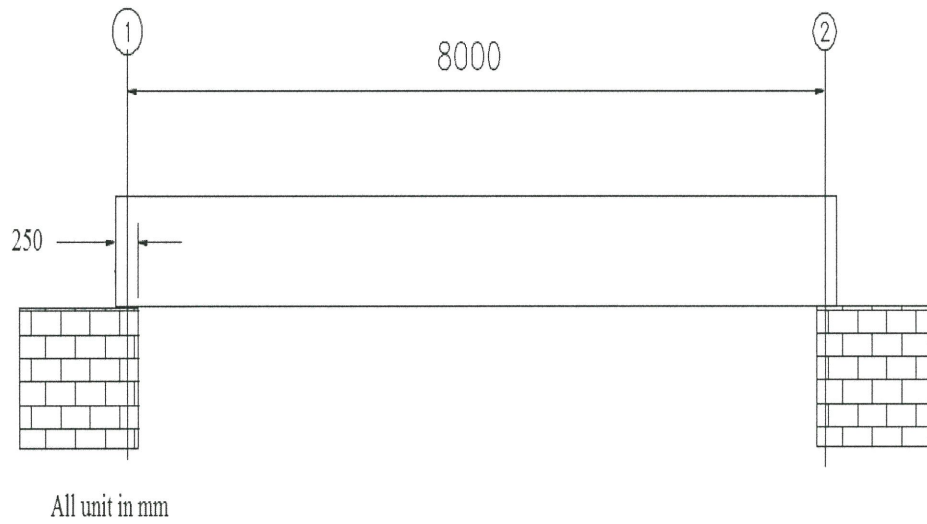


FIGURE Q3

CONFIDENTIAL

Q4 **FIGURE Q4** shows the layout plan for the part of the first floor of reinforced concrete buildings. The concrete for slabs and beams are poured together and the thickness of the slab is 175 mm. Detail specification is given as follows:

Design action, n	$= (1.35g_k + 1.5q_k)$	$=$	15 kN/m ² .
Characteristic strength of concrete, f_{ck}		$=$	25 N/mm ²
Characteristic strength of steel bar, f_{yk}		$=$	500 N/mm ²
Concrete cover, c		$=$	25 mm

- (a) Determine the positive and negative moments for Panel S1. (6 marks)
- (b) Determine the minimum and maximum reinforcement area. (3 marks)
- (c) Design the flexural reinforcement required at mid span. Assume bar size of 10 mm. (10 marks)
- (d) Check the deflection for the slab panel. (6 marks)

- Q5** (a) Steel sections are rolled or formed into a variety of cross-sections. Steel sections are usually produced in a variety of grades of steel which having different strengths and other properties such as mechanical properties. List the mechanical properties for steel. (7 marks)
- (b) Classify the cross-section of a 610 x 229 x 125UB grade S275 as shown in **FIGURE Q5**. The section is subjected to bending moment at a major axis (y-y) and axial force of 350 kN. (18 marks)

- END OF QUESTION -

CONFIDENTIAL

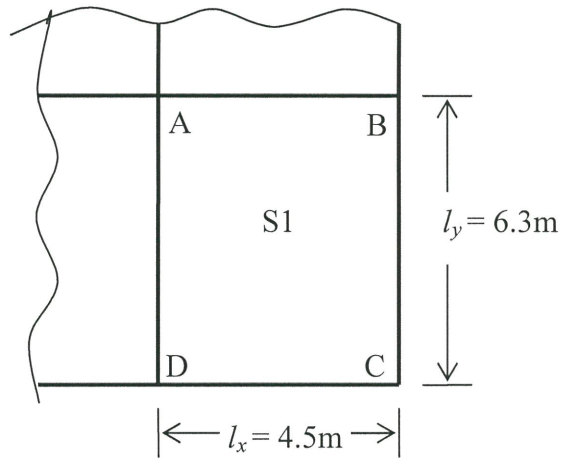
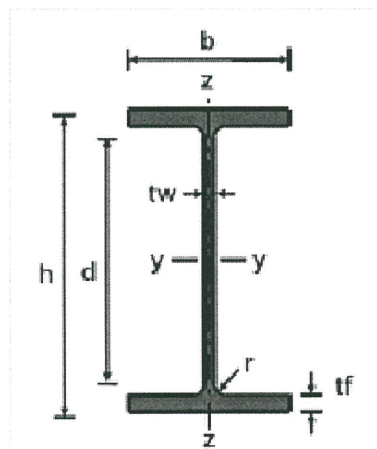
CONFIDENTIAL**FINAL EXAMINATION**

SEMESTER/SESI: SEM II/2014/2015

PROGRAMME: 2 BNA/2 BNB/2 BNC

COURSE NAME: STRUCTURE ANALYSIS & DESIGN

COURSE CODE: BNP 20803

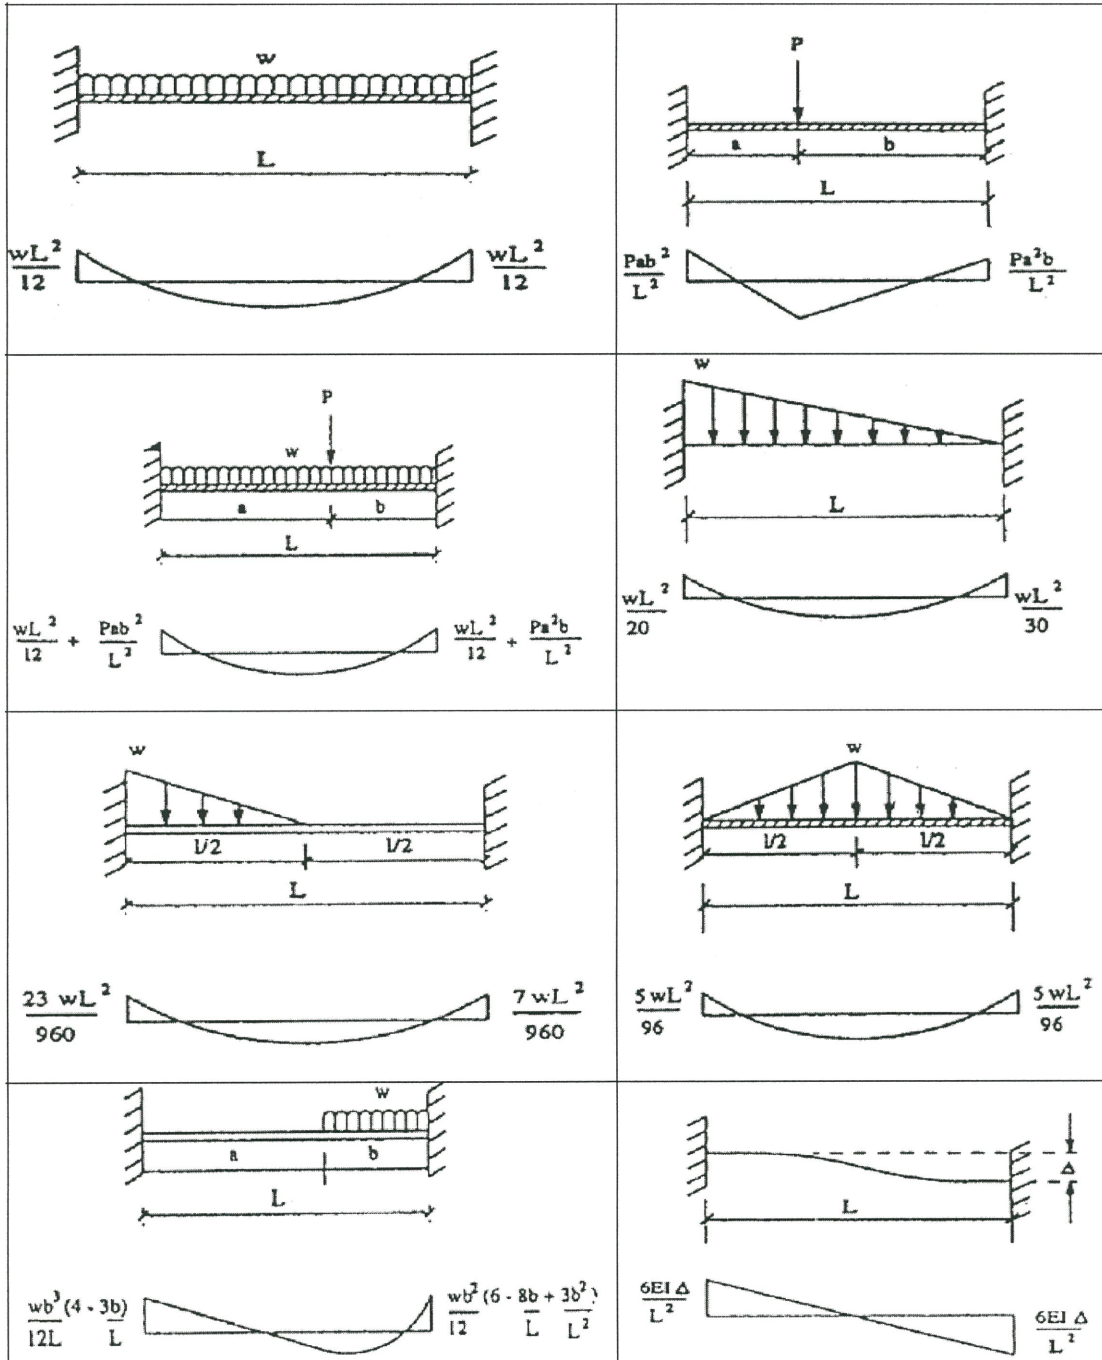
**FIGURE Q4**

$h = 612.2 \text{ mm}$
 $b = 229.0 \text{ mm}$
 $t_w = 11.9 \text{ mm}$
 $t_f = 19.6 \text{ mm}$
 $r = 12.7 \text{ mm}$
 $A = 15900 \text{ mm}^2$

FIGURE Q5**CONFIDENTIAL**

CONFIDENTIAL**FINAL EXAMINATION**SEMESTER/SESI: SEM II/2014/2015
COURSE NAME: STRUCTURE ANALYSIS & DESIGNPROGRAMME: 2 BNA/2 BNB/2 BNC
COURSE CODE: BNP 20803

APPENDIX

**CONFIDENTIAL**

CONFIDENTIAL**FINAL EXAMINATION**SEMESTER/SESI: SEM II/2014/2015
COURSE NAME: STRUCTURE ANALYSIS & DESIGNPROGRAMME: 2 BNA/2 BNB/2 BNC
COURSE CODE: BNP 20803

APPENDIX

Table 3.14 — Bending moment coefficients for rectangular panels supported on four sides with provision for torsion at corners

Type of panel and moments considered	Short span coefficients, β_x								Long span coefficients, β_y for all values of l_y/l_x
	Values of l_y/l_x								
	1.0	1.1	1.2	1.3	1.4	1.5	1.75	2.0	
Interior panels									
Negative moment at continuous edge	0.031	0.037	0.042	0.046	0.050	0.053	0.059	0.063	0.032
Positive moment at mid-span	0.024	0.028	0.032	0.035	0.037	0.040	0.044	0.048	0.024
One short edge discontinuous									
Negative moment at continuous edge	0.039	0.044	0.048	0.052	0.055	0.058	0.063	0.067	0.037
Positive moment at mid-span	0.029	0.033	0.036	0.039	0.041	0.043	0.047	0.050	0.028
One long edge discontinuous									
Negative moment at continuous edge	0.039	0.049	0.056	0.062	0.068	0.073	0.082	0.089	0.037
Positive moment at mid-span	0.030	0.036	0.042	0.047	0.051	0.055	0.062	0.067	0.028
Two adjacent edges discontinuous									
Negative moment at continuous edge	0.047	0.056	0.063	0.069	0.074	0.078	0.087	0.093	0.045
Positive moment at mid-span	0.036	0.042	0.047	0.051	0.055	0.059	0.065	0.070	0.034
Two short edges discontinuous									
Negative moment at continuous edge	0.046	0.050	0.054	0.057	0.060	0.062	0.067	0.070	—
Positive moment at mid-span	0.034	0.038	0.040	0.043	0.045	0.047	0.050	0.053	0.034
Two long edges discontinuous									
Negative moment at continuous edge	—	—	—	—	—	—	—	—	0.045
Positive moment at mid-span	0.034	0.046	0.056	0.065	0.072	0.078	0.091	0.100	0.034
Three edges discontinuous (one long edge continuous)									
Negative moment at continuous edge	0.057	0.065	0.071	0.076	0.081	0.084	0.092	0.098	—
Positive moment at mid-span	0.043	0.048	0.053	0.057	0.060	0.063	0.069	0.074	0.044
Three edges discontinuous (one short edge continuous)									
Negative moment at continuous edge	—	—	—	—	—	—	—	—	0.058
Positive moment at mid-span	0.042	0.054	0.063	0.071	0.078	0.084	0.096	0.105	0.044
Four edges discontinuous									
Positive moment at mid-span	0.055	0.065	0.074	0.081	0.087	0.092	0.103	0.111	0.056

CONFIDENTIAL

CONFIDENTIAL**FINAL EXAMINATION**

SEMESTER/SESI: SEM II/2014/2015
 COURSE NAME: STRUCTURE ANALYSIS & DESIGN

PROGRAMME: 2 BNA/2 BNB/2 BNC
 COURSE CODE: BNP 20803

APPENDIX

Table 5.5: Minimum dimensions and axis distances for simply supported beams made with reinforced and prestressed concrete

Standard fire resistance	Minimum dimensions (mm)						
	Possible combinations of a and b_{min} where a is the average axis distance and b_{min} is the width of beam				Web thickness b_w		
					Class WA	Class WB	Class WC
1	2	3	4	5	6	7	8
R 30	$b_{min} = 80$ $a = 25$	120 20	160 15*	200 15*	80	80	80
R 60	$b_{min} = 120$ $a = 40$	160 35	200 30	300 25	100	80	100
R 90	$b_{min} = 150$ $a = 55$	200 45	300 40	400 35	110	100	100
R 120	$b_{min} = 200$ $a = 65$	240 60	300 55	500 50	130	120	120
R 180	$b_{min} = 240$ $a = 80$	300 70	400 65	600 60	150	150	140
R 240	$b_{min} = 280$ $a = 90$	350 80	500 75	700 70	170	170	160
$a_{sd} = a + 10\text{mm}$ (below)		(see note below)					
For prestressed beams the increase of axis distance according to 5.2(5) should be noted.							
a_{sd} is the axis distance to the side of beam for the corner bars (or tendon or wire) of beams with only one layer of reinforcement. For values of b_{min} greater than that given in Column 4 no increase of a_{sd} is required.							
* Normally the cover required by EN 1992-1-1 will control.							

CONFIDENTIAL

CONFIDENTIAL**FINAL EXAMINATION**

SEMESTER/SESI: SEM II/2014/2015
 COURSE NAME: STRUCTURE ANALYSIS & DESIGN

PROGRAMME: 2 BNA/2 BNB/2 BNC
 COURSE CODE: BNP 20803

APPENDIX

Table 3.1 (continued): Nominal values of yield strength f_y and ultimate tensile strength f_u for structural hollow sections

Standard and steel grade	Nominal thickness of the element t [mm]			
	$t \leq 40$ mm		$40 \text{ mm} < t \leq 80$ mm	
	f_y [N/mm ²]	f_u [N/mm ²]	f_y [N/mm ²]	f_u [N/mm ²]
EN 10210-1				
S 235 H	235	360	215	340
S 275 H	275	430	255	410
S 355 H	355	510	335	490
S 275 NH/NLH	275	390	255	370
S 355 NH/NLH	355	490	335	470
S 420 NH/NHL	420	540	390	520
S 460 NH/NLH	460	560	430	550
EN 10219-1				
S 235 H	235	360		
S 275 H	275	430		
S 355 H	355	510		
S 275 NH/NLH	275	370		
S 355 NH/NLH	355	470		
S 460 NH/NLH	460	550		
S 275 MH/MLH	275	360		
S 355 MH/MLH	355	470		
S 420 MH/MLH	420	500		
S 460 MH/MLH	460	530		

CONFIDENTIAL**FINAL EXAMINATION**SEMESTER/SESI: SEM II/2014/2015
COURSE NAME: STRUCTURE ANALYSIS & DESIGNPROGRAMME: 2 BNA/2 BNB/2 BNC
COURSE CODE: BNP 20803

APPENDIX

Table 5.2 (sheet 1 of 3): Maximum width-to-thickness ratios for compression parts

Internal compression parts						
				Axis of bending		
Class	Part subject to bending	Part subject to compression	Part subject to bending and compression			
Stress distribution in parts (compression positive)						
1	$c/t \leq 72\varepsilon$	$c/t \leq 33\varepsilon$	when $\alpha > 0,5$: $c/t \leq \frac{396\varepsilon}{13\alpha - 1}$ when $\alpha \leq 0,5$: $c/t \leq \frac{36\varepsilon}{\alpha}$			
2	$c/t \leq 83\varepsilon$	$c/t \leq 38\varepsilon$	when $\alpha > 0,5$: $c/t \leq \frac{456\varepsilon}{13\alpha - 1}$ when $\alpha \leq 0,5$: $c/t \leq \frac{41,5\varepsilon}{\alpha}$			
Stress distribution in parts (compression positive)						
3	$c/t \leq 124\varepsilon$	$c/t \leq 42\varepsilon$	when $\psi > -1$: $c/t \leq \frac{42\varepsilon}{0,67 + 0,33\psi}$ when $\psi \leq -1^*)$: $c/t \leq 62\varepsilon(1 - \psi)\sqrt{-\psi}$			
$\varepsilon = \sqrt{235/f_y}$	f_y	235	275	355	420	460
	ε	1,00	0,92	0,81	0,75	0,71

*) $\psi \leq -1$ applies where either the compression stress $\sigma \leq f_y$ or the tensile strain $\varepsilon_y > f_y/E$ **CONFIDENTIAL**

CONFIDENTIAL**FINAL EXAMINATION**

SEMESTER/SESI: SEM II/2014/2015
 COURSE NAME: STRUCTURE ANALYSIS & DESIGN

PROGRAMME: 2 BNA/2 BNB/2 BNC
 COURSE CODE: BNP 20803

APPENDIX

Table 5.2 (sheet 2 of 3): Maximum width-to-thickness ratios for compression parts

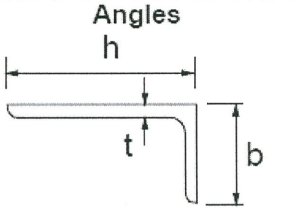
Outstand flanges						
		Rolled sections		Welded sections		
Class	Part subject to compression	Part subject to bending and compression				
		Tip in compression		Tip in tension		
Stress distribution in parts (compression positive)						
1	$c/t \leq 9\epsilon$	$c/t \leq \frac{9\epsilon}{\alpha}$		$c/t \leq \frac{9\epsilon}{\alpha\sqrt{\alpha}}$		
2	$c/t \leq 10\epsilon$	$c/t \leq \frac{10\epsilon}{\alpha}$		$c/t \leq \frac{10\epsilon}{\alpha\sqrt{\alpha}}$		
Stress distribution in parts (compression positive)						
3	$c/t \leq 14\epsilon$	$c/t \leq 21\epsilon\sqrt{k_\sigma}$ For k_σ see EN 1993-1-5				
$\epsilon = \sqrt{235/f_y}$	f_y	235	275	355	420	460
	ϵ	1,00	0,92	0,81	0,75	0,71

CONFIDENTIAL

CONFIDENTIAL**FINAL EXAMINATION**SEMESTER/SESI: SEM II/2014/2015
COURSE NAME: STRUCTURE ANALYSIS & DESIGNPROGRAMME: 2 BNA/2 BNB/2 BNC
COURSE CODE: BNP 20803

APPENDIX

Table 5.2 (sheet 3 of 3): Maximum width-to-thickness ratios for compression parts

Class		Section in compression				
Stress distribution across section (compression positive)						
3		$\boxed{AC_2} \quad h/t \leq 15\epsilon \text{ and } \frac{b+h}{2t} \leq 11,5\epsilon \quad \boxed{AC_2}$				
Class		Section in bending and/or compression				
1		$d/t \leq 50\epsilon^2$				
2		$d/t \leq 70\epsilon^2$				
3		$d/t \leq 90\epsilon^2$				
NOTE For $d/t > 90\epsilon^2$ see EN 1993-1-6.						
$\epsilon = \sqrt{235/f_y}$	f_y	235	275	355	420	460
	ϵ	1,00	0,92	0,81	0,75	0,71
	ϵ^2	1,00	0,85	0,66	0,56	0,51

CONFIDENTIAL

CONFIDENTIAL**FINAL EXAMINATION**SEMESTER/SESI: SEM II/2014/2015
COURSE NAME: STRUCTURE ANALYSIS & DESIGNPROGRAMME: 2 BNA/2 BNB/2 BNC
COURSE CODE: BNP 20803**FORMULA**

$$z = d \left[0.5 + \sqrt{0.25 - \frac{K_{bal}}{1.134}} \right] \quad A_s' = \frac{(K - K_{bal}) f_{ck} b d^2}{0.87 f_{yk} (d - d')}$$

$$A_s = \frac{K_{bal} f_{ck} b d^2}{0.87 f_{yk} z_{bal}} + A_s'$$

$$V_{Rd,max} = \frac{0.36 b_w d f_{ck} (1 - f_{ck} / 250)}{\cot \theta + \tan \theta}$$

$$\theta = 0.5 \sin^{-1} \left(\frac{V_{Ed}}{0.18 b_w d f_{ck} (1 - f_{ck} / 250)} \right)$$

$$\frac{A_{sw}}{s} = \frac{V_{Ed}}{0.78 f_{yk} d \cot \theta}$$

$$\frac{A_{sw,max}}{s} = \frac{0.08 f_{ck}^{1/2} b_w}{f_{yk}}$$

$$f_s = \frac{f_{yk}}{1.15} \left[\frac{G_k + 0.3 Q_k}{1.35 G_k + 1.5 Q_k} \right] \frac{1}{\delta}$$

CONFIDENTIAL

CONFIDENTIAL**FINAL EXAMINATION**

SEMESTER/SESI: SEM II/2014/2015
 COURSE NAME: STRUCTURE ANALYSIS & DESIGN

PROGRAMME: 2 BNA/2 BNB/2 BNC
 COURSE CODE: BNP 20803

Table 1: Cross Sectional Area (mm²) according to Size and Numbers of Bar

Bar Size (mm)	Number of bar								Perimeter (mm)
	1	2	3	4	5	6	7	8	
6	28.3	56.6	84.9	113	141	170	198	226	18.9
8	50.3	101	151	201	251	302	352	402	25.1
10	78.6	157	236	314	393	471	550	629	31.4
12	113	226	339	453	566	679	792	905	37.7
16	201	402	603	805	1006	1207	1408	1609	50.3
20	314	629	943	1257	1571	1886	2200	2514	62.9
25	491	982	1473	1964	2455	2946	3438	3929	78.6
32	805	1609	2414	3218	4023	4827	5632	6437	100.6
40	1257	2514	3771	5029	6286	7543	8800	10057	125.7

Table 2: Cross Sectional Area (mm²) for every meter width at distance between bar

Bar Size (mm)	Distance between Bar (mm)								
	50	75	100	125	150	175	200	250	300
6	566	377	283	226	189	162	141	113	94
8	1006	670	503	402	335	287	251	201	168
10	1571	1048	786	629	524	449	393	314	262
12	2263	1509	1131	905	754	647	566	453	377
16	4023	2682	2011	1609	1341	1149	1006	805	670
20	6286	4190	3143	2514	2095	1796	1571	1257	1048
25	9821	6548	4911	3929	3274	2806	2455	1964	1637
32	16091	10728	8046	6437	5364	4598	4023	3218	2682
40	25143	16762	12571	10057	8381	7184	6286	5029	4190